


PRODUCT SPECIFICATION SHEET

ThinkHub®

98" 4K with ThinkHub Pro

ThinkHub consolidates the moving pieces of teamwork - devices, applications, people, ideas, and content - to revolutionize your ability to achieve great work, together. Whether you're giving a presentation, running a brainstorming session, or strategizing with your team - use ThinkHub to engage with your peers and cultivate exceptional work anytime, anywhere.

SKU	WX-OT5-06M2-98-THP
Target Applications	
	Classrooms Huddle Spaces Briefing Centers Board Rooms Design Centers Training Rooms Executive Offices Libraries
Room Types	
Room Size	Small to Medium (2-10 people)
Technical Specifications (Display)	
Display Resolution (W x H)	3840 x 2160 @ 60Hz
Video Input	1 x HDMI 2.0
Dimensions (W x H x D)	87.5" x 50.3" x 4.2"
Weight	278 lbs
Brightness	450 (cd/m2)
Power Consumption	273 W Max
Operating Temperature	0 C - 40 C
Touch Technology	IR touch: 20 points
Glass	ERO optically-bonded glass technology, Soda-lime Glass, 3mm AR
VESA pattern	600mm x 400mm
Audio	2 x 10W
Technical Specifications (ThinkHub CPU)	
Dimensions (W x H x D)	21.2in x 19in x 8.7in (5RU)
Weight	40 lbs
Resolution	Portrait: up to 2160x3840 @ 60hz, Landscape: up to 3840x2160 @ 60hz
Power Consumption	Max: 1280 W
Thermal Output	Max: 4367 BTU/h
Storage / RAM	1TB SSD / 64GB
Processor + GPU	Apple M2 Ultra with 24-core CPU, 60-core GPU, 32-core Neural Engine
Network	Wired 10Gbps (preferred) Optional Wi-Fi 6E (802.11ax)2
Built-in Protocol	T1V app
I/O	(2) USB-A 3.0 (2) Ethernet 10G Base-T 3.5mm Stereo Out (8) Thunderbolt 3 (2) HDMI (24) Optional Hardline Inputs*
* standard hardline inputs accept 1080p video sources, which will be viewed at @30 Hz; 4K also supported, but each 4K source = 4 1080p sources	
Hardware Warranty	2 years
BYOD Connectivity	
T1V app	macOS, iOS, Windows, Android, Linux platforms
Required bandwidth per live stream	typical: 300 kb/s max: 3 mb/s
Streaming Media	Stream 1080p at 30fps w/synchronized audio (macOS, Windows)
User Capacity	50 simultaneous participants
Wireless Device Connectivity	No dongle needed; toggle between users via the T1V app
TouchControl™	Unlimited TouchControl™ device remote control on Windows, macOS
Network Modes	Direct Mode: Compatible with a single subnet and/or multiple subnets World Mode: Developed for environments where Direct Mode is not possible (due to network architecture or security restraints)

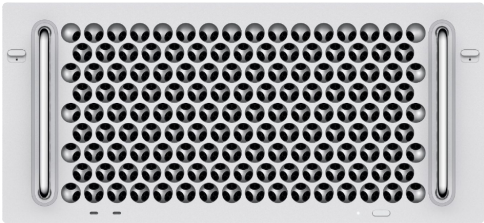

Rack-mounted CPU (5RU)

