


PRODUCT SPECIFICATION SHEET

ThinkHub®

85" 4K with ThinkHub Pro

ThinkHub consolidates the moving pieces of teamwork - devices, applications, people, ideas, and content - to revolutionize your ability to achieve great work, together. Whether you're giving a presentation, running a brainstorming session, or strategizing with your team - use ThinkHub to engage with your peers and cultivate exceptional work anytime, anywhere.

| | |
|--|---|
| SKU | WX-OT5AV-06M2-85-THC |
| Target Applications | |
| Room Types | Classrooms Huddle Spaces Briefing Centers Board Rooms Design Centers Training Rooms Executive Offices Libraries |
| Room Size | Small to Medium (2-10 people) |
| Technical Specifications (Display) | |
| Display Resolution (W x H) | 3840 x 2160 @ 60Hz |
| Video Input | 1 x HDMI 2.0 |
| Dimensions (W x H x D) | 75.96 x 44.82 x 4.61 in |
| Weight | 201.28 lbs |
| Brightness | 500 (cd/m2) |
| Power Consumption | 480 W Max |
| Operating Temperature | 0 C - 40 C |
| Touch Technology | InGlass™ Intelligent touch |
| Glass | 2 mm Optically Bonded, Anti-Glare, Anti-Fingerprint Glass |
| VESA pattern | 600mm x 400mm |
| Audio | 4 x 10W |
| Technical Specifications (ThinkHub CPU) | |
| Dimensions (W x H x D) | 21.2in x 19in x 8.7in (5RU) |
| Weight | 40 lbs |
| Resolution | Portrait: up to 2160x3840 @ 60hz, Landscape: up to 3840x2160 @ 60hz |
| Power Consumption | Max: 1280 W |
| Thermal Output | Max: 4367 BTU/h |
| Storage / RAM | 1TB SSD / 64GB |
| Processor + GPU | Apple M2 Ultra with 24-core CPU, 60-core GPU, 32-core Neural Engine |
| Network | Wired 10Gbps (preferred) Optional Wi-Fi 6E (802.11ax)2 |
| Built-in Protocol | T1V app |
| I/O | (2) USB-A 3.0 (2) Ethernet 10G Base-T 3.5mm Stereo Out (8) Thunderbolt 3 (2) HDMI (24) Optional Hardline Inputs* |
| * standard hardline inputs accept 1080p video sources, which will be viewed at @30 Hz; 4K also supported, but each 4K source = 4 1080p sources | |
| Hardware Warranty | 2 years |
| BYOD Connectivity | |
| T1V app | macOS, iOS, Windows, Android, Linux platforms |
| Required bandwidth per live stream | typical: 300 kb/s max: 3 mb/s |
| Streaming Media | Stream 1080p at 30fps w/synchronized audio (macOS, Windows) |
| User Capacity | 50 simultaneous participants |
| Wireless Device Connectivity | No dongle needed; toggle between users via the T1V app |
| TouchControl™ | Unlimited TouchControl™ device remote control on Windows, macOS |
| Network Modes | Direct Mode: Compatible with a single subnet and/or multiple subnets World Mode: Developed for environments where Direct Mode is not possible (due to network architecture or security restraints) |

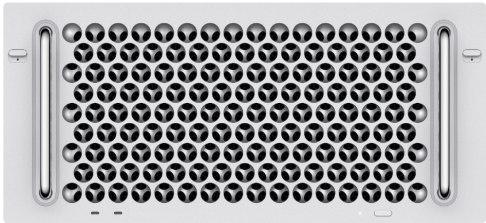

Rack-mounted CPU (5RU)

MultiPoint Broadcast Relay



| | |
|------------------------|--------------------------|
| Dimensions (W x H x D) | 4.55in x 4.57in x 2.01in |
| Weight | 2 lbs |
| Power Consumption | 65W |
| Thermal Output | 222 BTU/hr |
| Network | Wired 1Gbps |

