

PRODUCT SPECIFICATION SHEET

ThinkHub®

75" 4K with ThinkHub Pro

ThinkHub consolidates the moving pieces of teamwork - devices, applications, people, ideas, and content - to revolutionize your ability to achieve great work, together. Whether you're giving a presentation, running a brainstorming session, or strategizing with your team - use ThinkHub to engage with your peers and cultivate exceptional work anytime, anywhere.


SKU	WX-OT5AV-07M2M-75-THC
Target Applications	
	Classrooms Huddle Spaces Briefing Centers Board Rooms Design Centers Training Rooms Executive Offices Libraries
Room Types	
Room Size	Small to Medium (2-10 people)
Technical Specifications (Display)	
Display Resolution (W x H)	3840 x 2160 @ 60Hz
Video Input	1 x HDMI 2.0
Dimensions (W x H x D)	67.07 x 39.73 x 4.6 in
Weight	157.85 lbs
Brightness	500 (cd/m2)
Power Consumption	395 W Max
Operating Temperature	0 C - 40 C
Touch Technology	InGlass™ Intelligent touch
Glass	2 mm Optically Bonded, Anti-Glare, Anti-Fingerprint Glass
VESA pattern	600mm x 400mm
Audio	4 x 10W
Technical Specifications (ThinkHub Device)	
Dimensions (W x D x H)	19in x 5.25in x 15in (3RU)
Weight	20 lbs
Resolution	Portrait: up to 2160x3840 @ 60hz, Landscape: up to 3840x2160 @ 60hz
Power Consumption	Max: 370 W
Thermal Output	Max: 1262 BTU/h
Storage / RAM	512GB / 32GB
Processor + Graphics	Apple M2 Max with 12-core CPU, 30-core GPU, 16-core Neural Engine
Network	Wired 1Gbps (preferred) Optional Wi-Fi 802.11ac / 802.11 a/b/g/n
Built-in Protocol	T1V app
I/O	USB 3.0 (5) (1) Ethernet 1000 Base-T; (2) RJ45 control ports RCA Stereo Out up to (2) HDMI output 4k 60hz 4:4:4 (8) Optional Hardline Inputs*
* hardline inputs accept 720p and 1080p video sources, which will be viewed at 1080p @30 Hz	
Hardware Warranty	2 years
BYOD Connectivity	
T1V app	macOS, iOS, Windows, Android, Linux platforms
Required bandwidth per live stream	typical: 300 kb/s max: 3 mb/s
Streaming Media	Stream 1080p at 30fps w/synchronized audio (macOS, Windows)
User Capacity	50 simultaneous participants
Wireless Device Connectivity	No dongle needed; toggle between users via the T1V app
TouchControl™	Unlimited TouchControl™ device remote control on Windows, macOS
Network Modes	Direct Mode: Compatible with a single subnet and/or multiple subnets World Mode: Developed for environments where Direct Mode is not possible (due to network architecture or security restraints)



Display



Rack Module

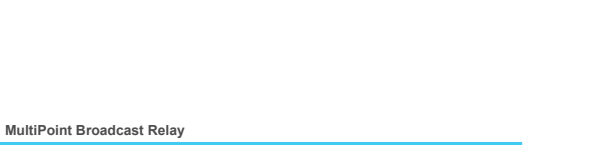

MultiPoint Broadcast Relay

Dimensions (W x H x D)	4.55in x 4.57in x 2.01in
Weight	2 lbs
Power Consumption	65W
Thermal Output	222 BTU/hr
Network	Wired 1Gbps

