
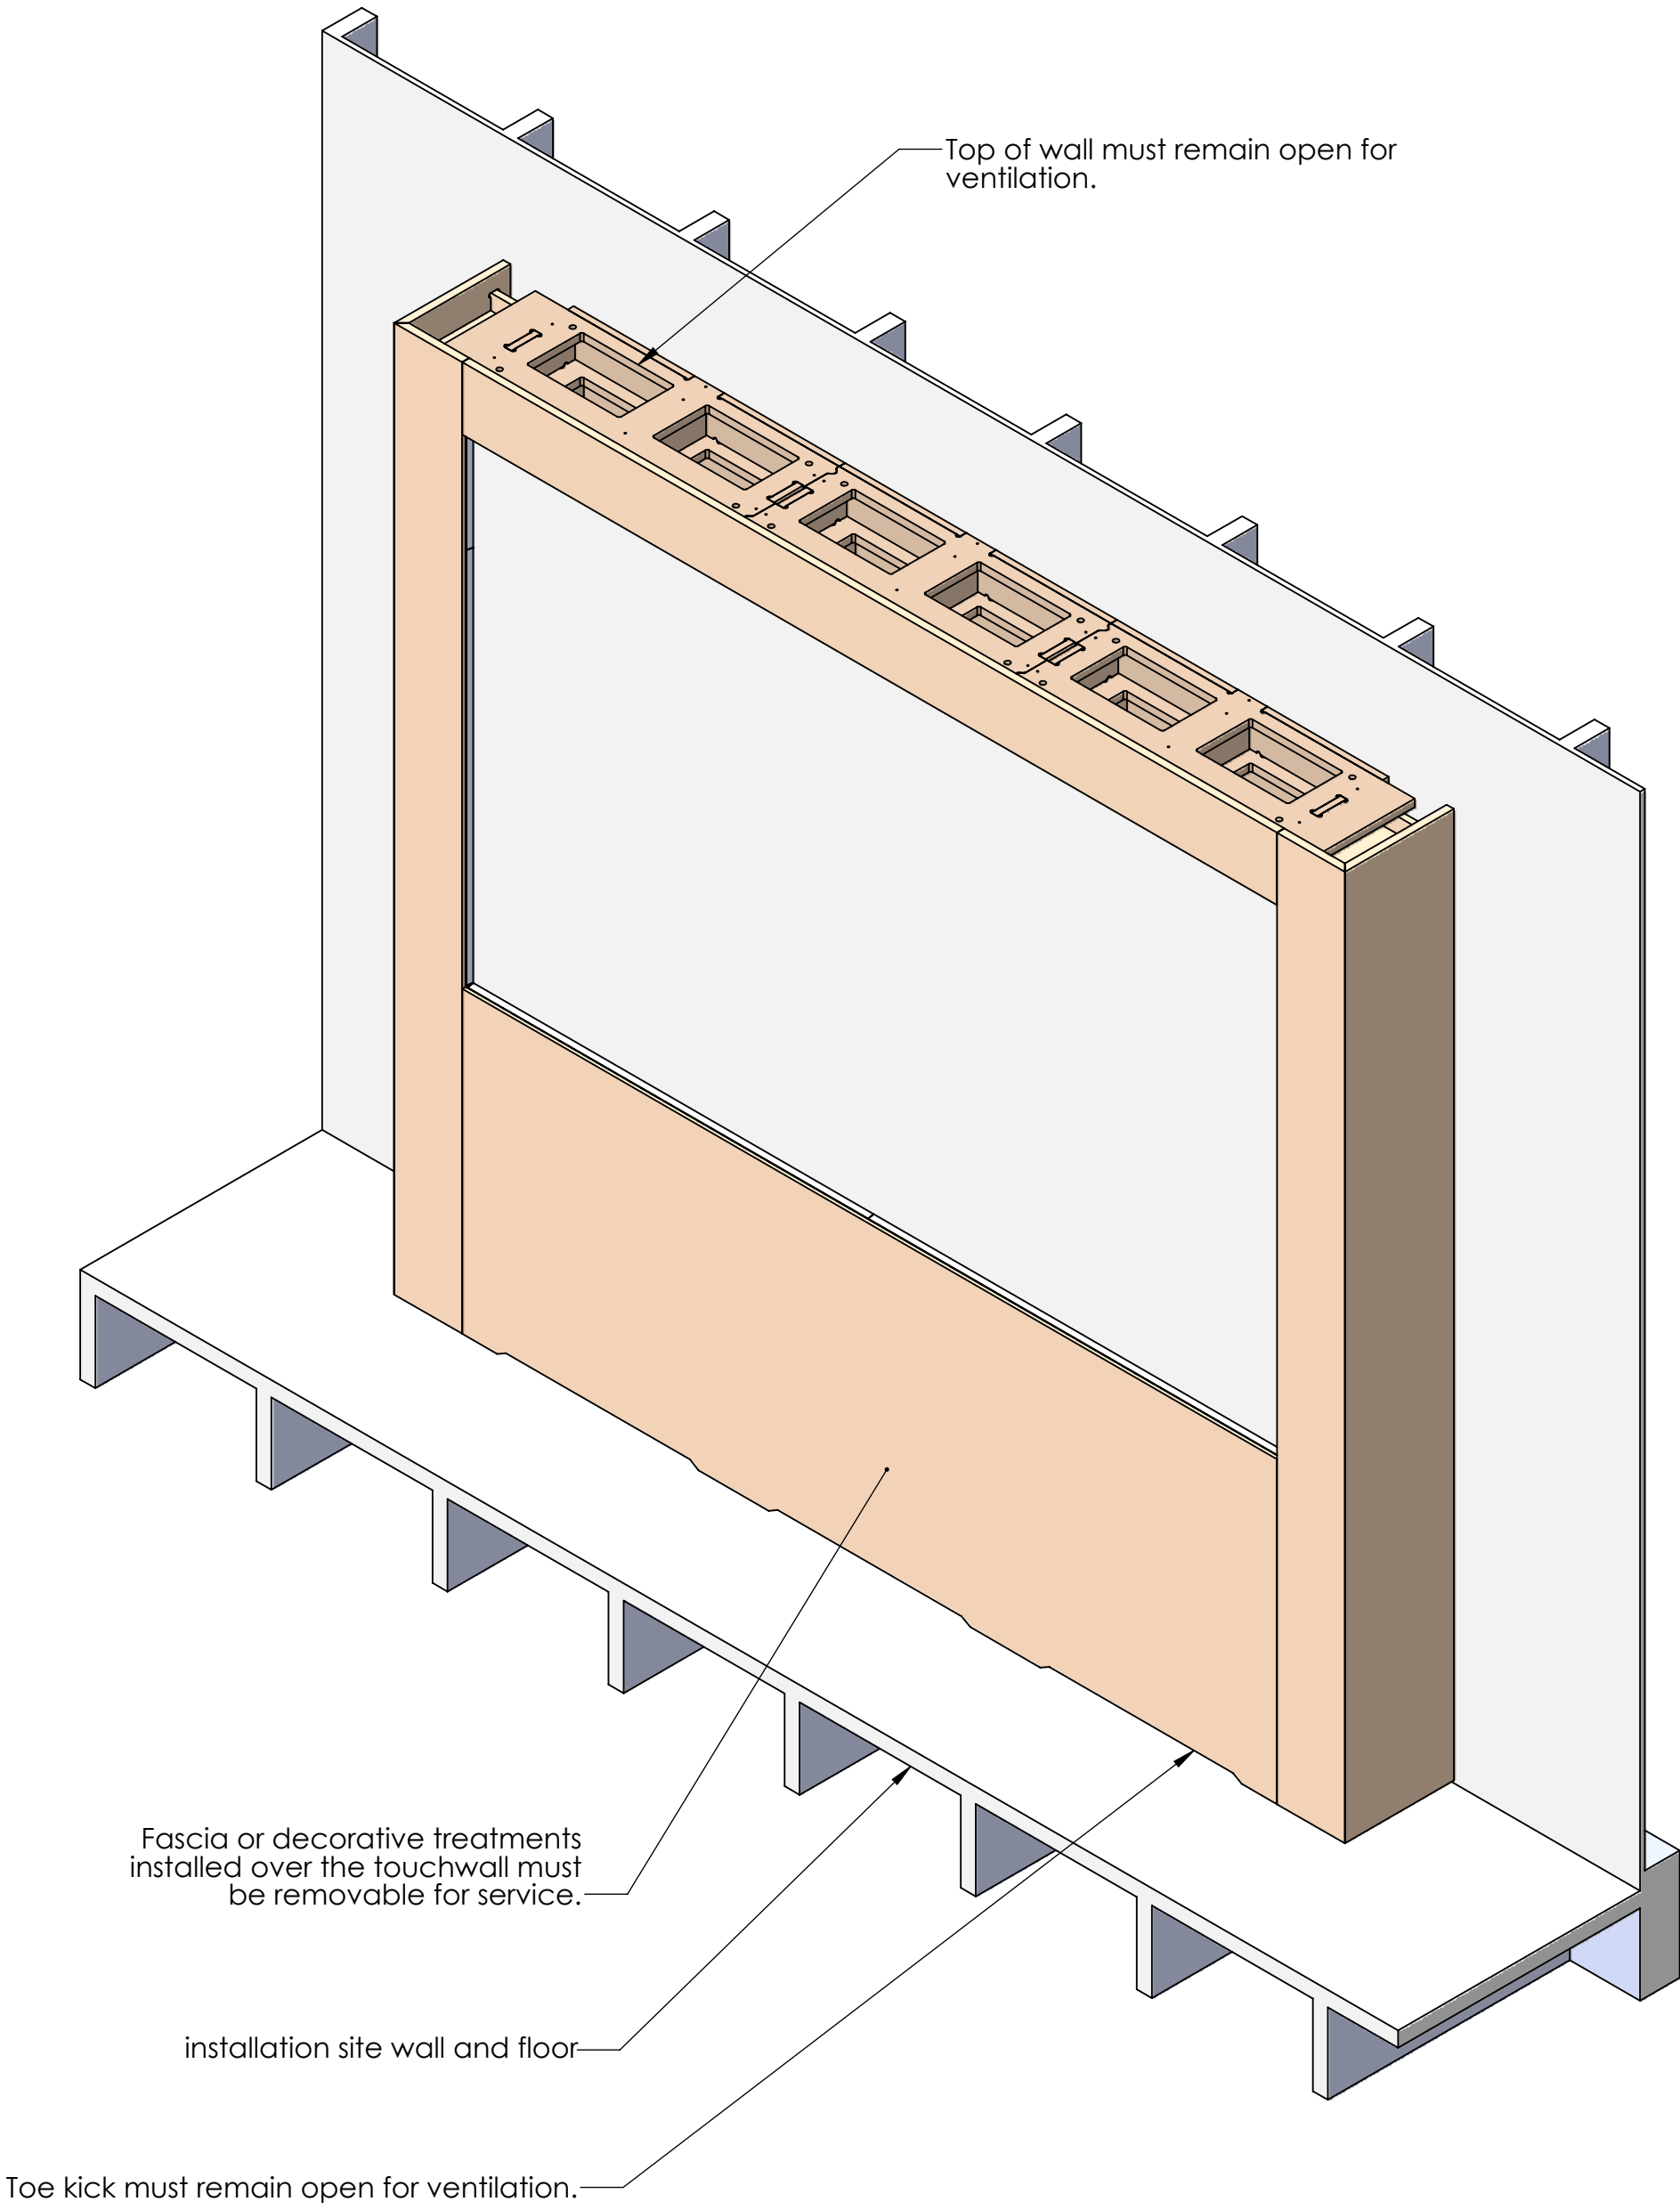
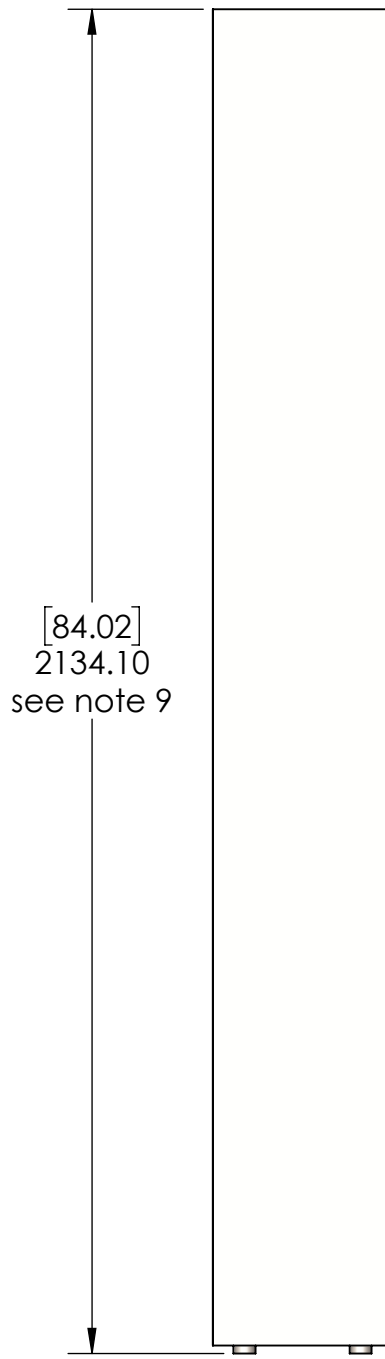
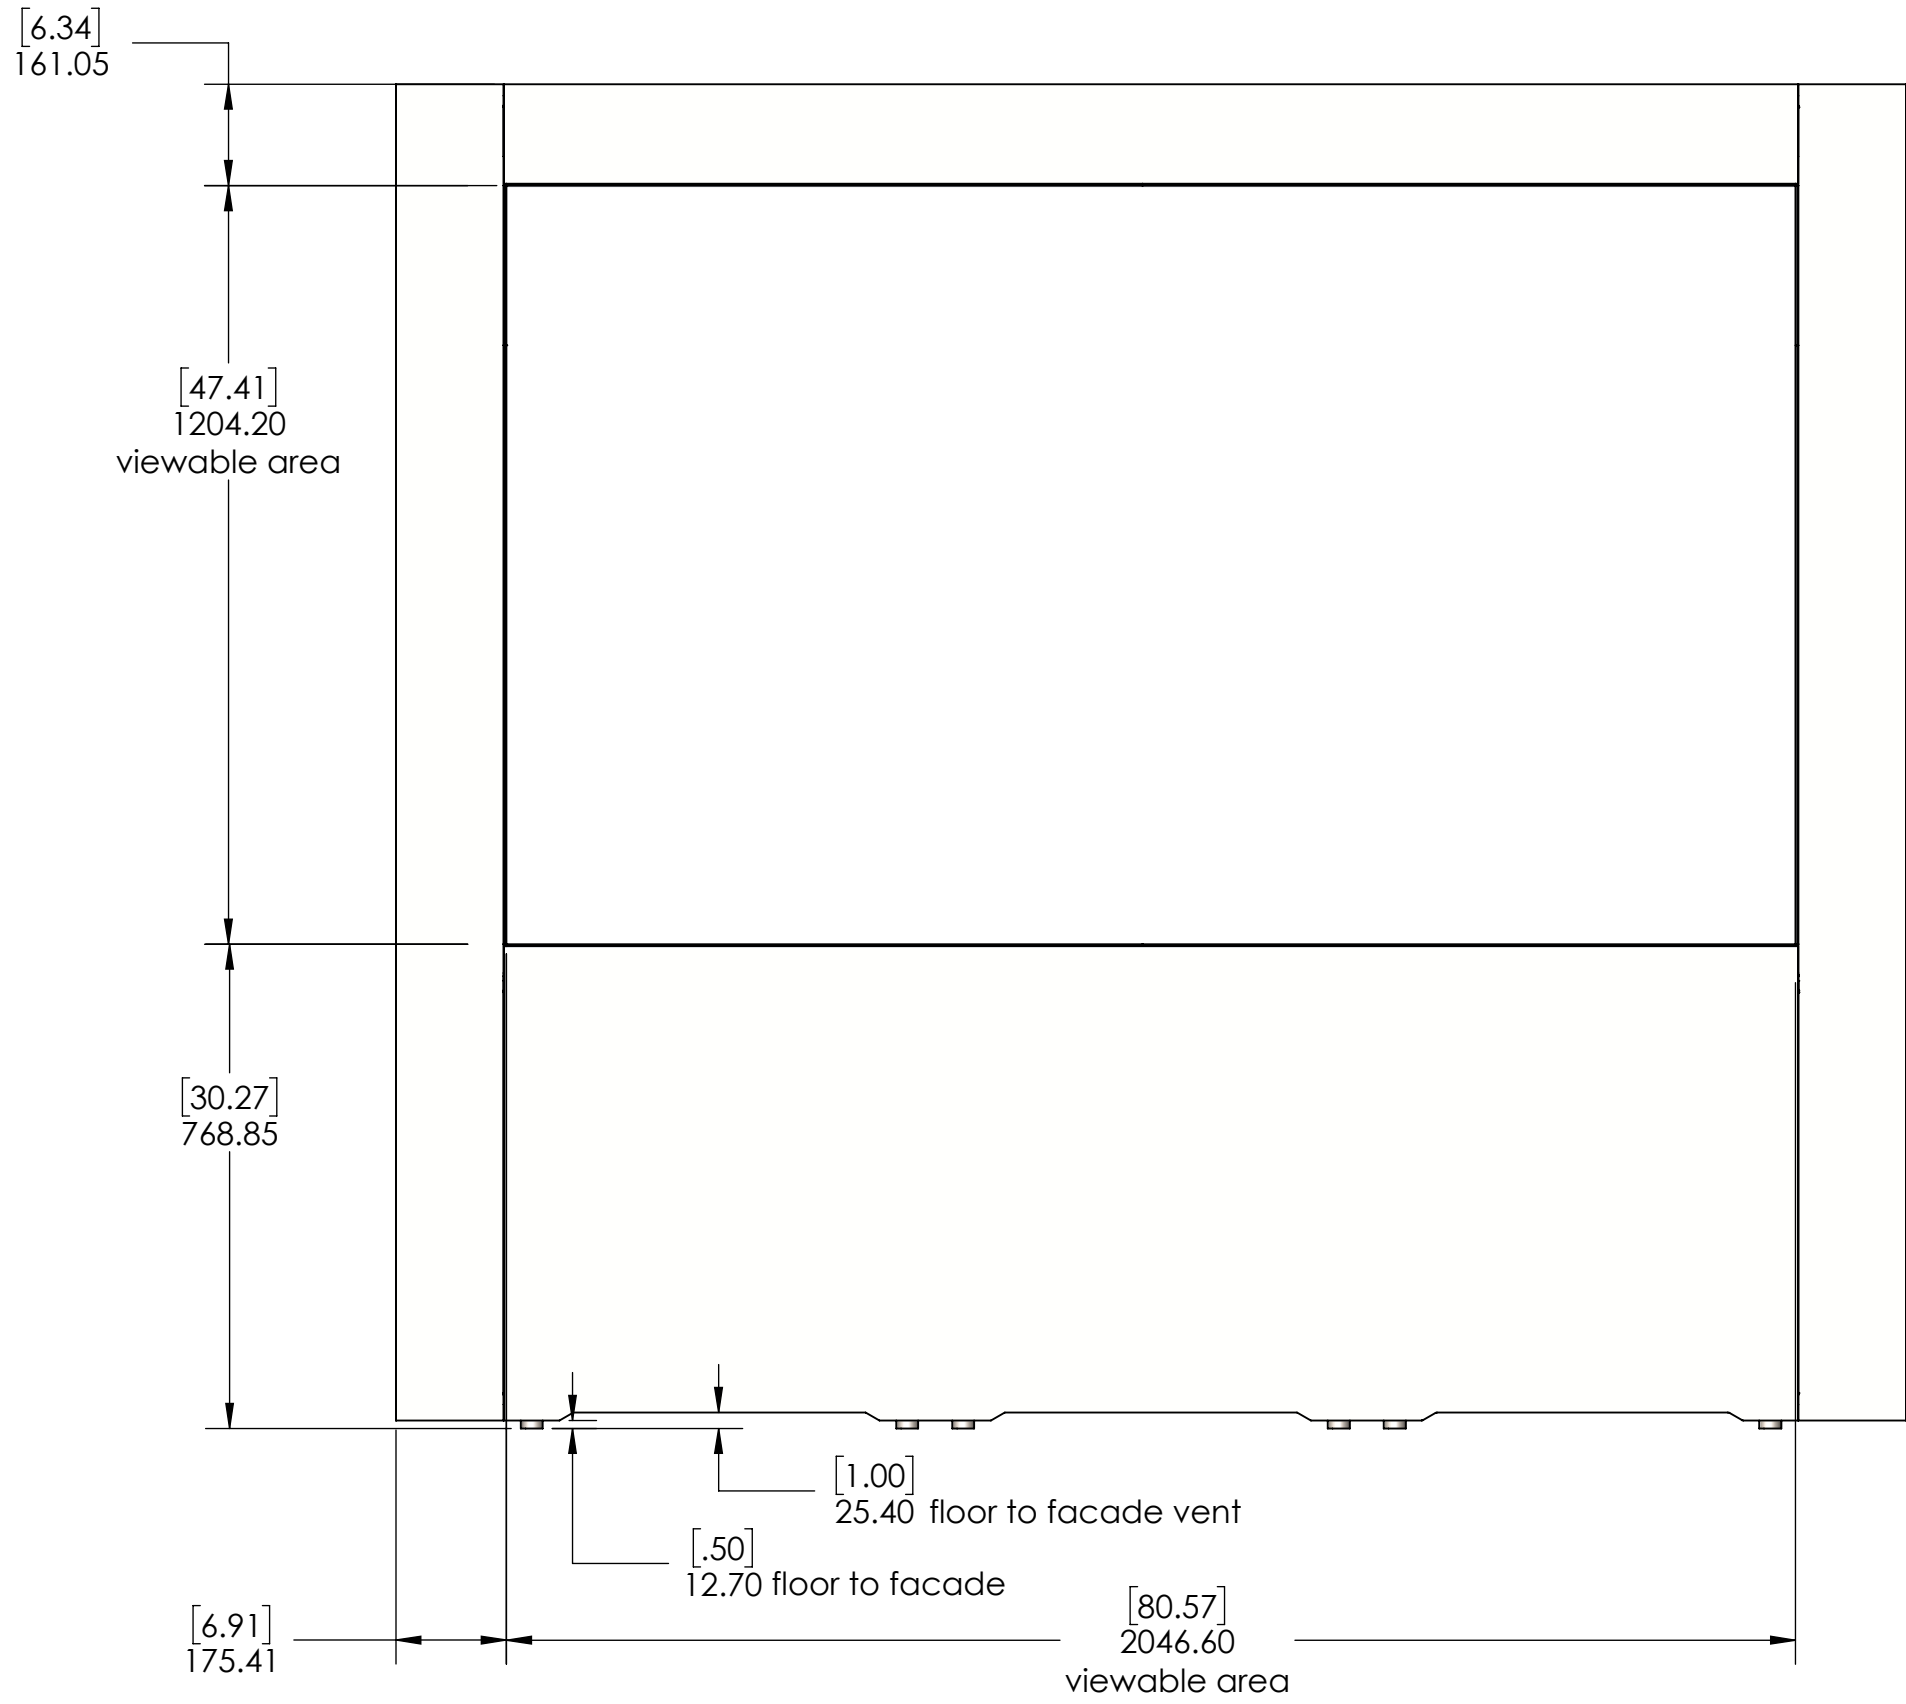


- NOTE:
- 1x 110v, 20A circuit
 - 1x CAT5 data line
 - If the CPU is to be located remotely, inquire about TIV's CPU rack module
 - If the rack module is to be used, structured wiring requirements will differ from those listed above.
 - Allow at least 1" space on either side of device when recessing into a wall.
 - Top and bottom must remain ventilated as indicated. Allow 3" above, open to front or back unless ventilated into wall and plenum above.
 - Facade panels included with wall system pop off to the front with a hard pull. Many facade treatments may be attached to these panels directly. Any facade treatments must be removable for service regardless of installation method.
 - Facade treatments should extend to the visible area.
 - Device must be installed completely flat, vertical and level. Shimming or leveler adjustment may be required which will increase installed thickness or height. Leave allowance accordingly when recessing this device into a wall and allow for facade treatments to be trimmed to field measurements.

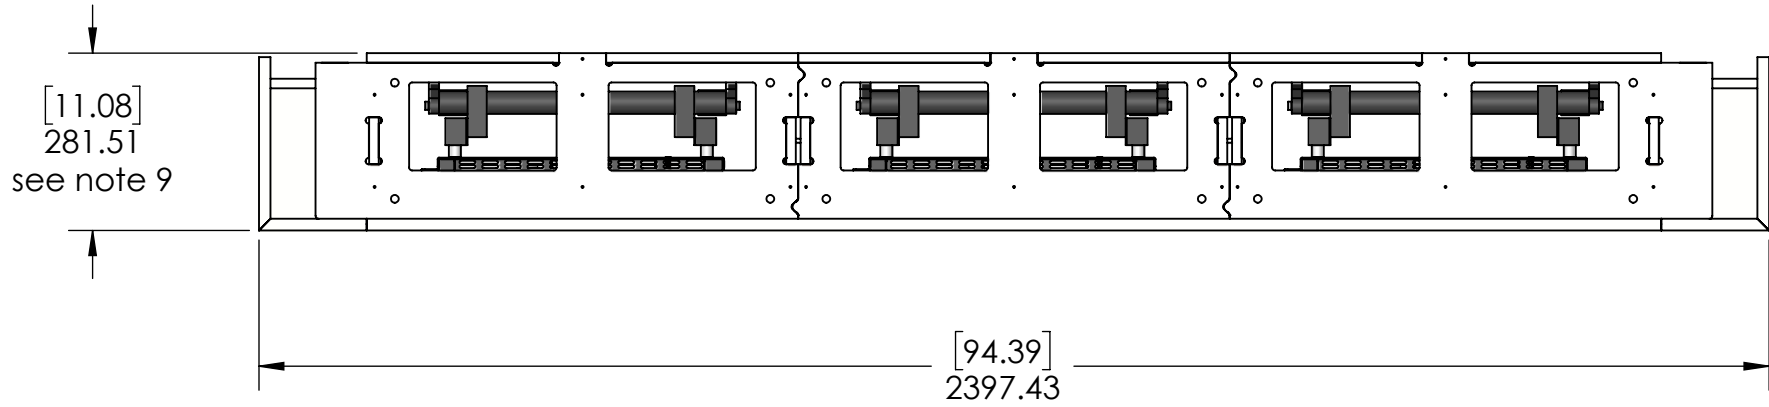

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING
IS THE SOLE PROPERTY OF TIV, INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF TIV, INC. IS PROHIBITED.

| SKU: | UNLESS OTHERWISE SPECIFIED: | DRAWN | NAME | DATE |
|-------------------|--------------------------------------|--------------|-------------|---------|
| SF-OT8-355x1PF-UB | DIMENSIONS ARE IN INCHES | GOB | | 7/19/18 |
| WP-OT8-355x1P-UB | FRACTIONAL ± | CHECKED | | |
| | ANGULAR: MATCH ± | ENG APPR. | | |
| | TWO PLACE DECIMAL ± | MFG APPR. | | |
| | THREE PLACE DECIMAL ± | | | |
| | INTERPRET GEOMETRIC TOLERANCING PER: | Q.A. | | |
| | MATERIAL: | | | |
| | FINISH: | | | |
| APPLICATION | MATERIAL THICKNESS: | DO NOT SCALE | SCALE: 1:12 | WEIGHT: |

| TITLE: | VERSION |
|--------------|---------|
| WP355 | 1 |
| SIZE | |
| D | |
| SHEET 1 OF 1 | |